# **CERAMIC SURFACE MOUNT LOW PROFILE MICROPROCESSOR CRYSTAL**

ABMM1





# **FEATURES:**

- Suitable for RoHS reflow profile
- Low height 1.1mm
- · Ideal for thin equipment
- AT cut offers a tight tolerance and stability ± 50ppm

## > APPLICATIONS:

- · Computers, Modems, Microprocessors
- · Communication, Test equipment
- PCMCIA


# STANDARD SPECIFICATIONS:

PARAMETERS			
ABRACON P/N	ABMM1 Series		
Frequency Range	6.0 MHz to 125 MHz		
Operation Mode	AT-cut 6.0 MHz ~ 33.0 MHz (Fundamental: Standard) 33.01 MHz ~ 125 MHz (Third-Overtone: Standard) 33.01 MHz ~ 50.0 MHz (Fundamental: See options)		
Operating Temperature	- 10°C to + 60°C (see options)		
Storage Temperature	- 40°C to + 85°C		
Frequency Tolerance at +25°C	± 50 ppm max. (see options)		
Frequency Stability over the Operating Temp. (Ref to +25°C)	± 50 ppm max. (see options)		
Equivalent Series Resistance	See Table 1		
Shunt Capacitance C₀	7pF max.		
Load Capacitance C <sub>L</sub>	18pF (see options)		
Drive Level	500μW max., 100μW typical		
Aging at 25°C First Year	± 5ppm max.		
Insulation Resistance	500Mohms min at 100Vdc ± 15V		

## **TABLE 1**

Frequency (MHz)	ESR (Ω) max.	Frequency (MHz)	ESR (Ω) max.
6.000 - 11.999(Fund)	70	20.000 - 50.000(Fund)	40
12.000 - 20.000(Fund)	50	33.000 - 125.00(3rd O/T)	80

# > OPTIONS & PART IDENTIFICATION:

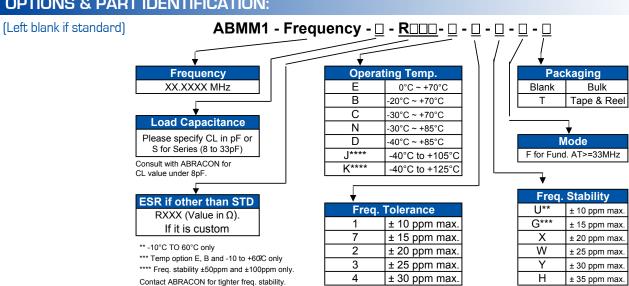






# CERAMIC SURFACE MOUNT LOW PROFILE MICROPROCESSOR CRYSTAL

ABMM1






# **OUTLINE DRAWING:**

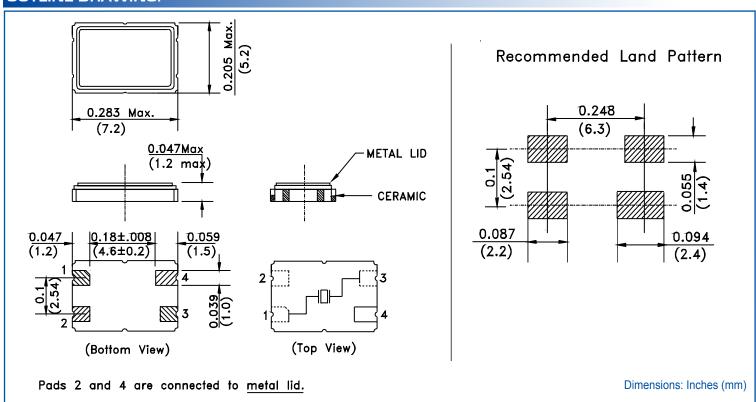

# TAPE & REEL: Tape and reel (1,000pcs/reel)

# Dimensions: (mm) FEEDING (PULL) DIRECTION 2.0±0.1 0.3±.005 91.5 91.5 91.5 8±0.1 17.5+2/-0 2.0±0.1 17.5+2/-0 2.0±0.1 91.5

# **REFLOW PROFILE**

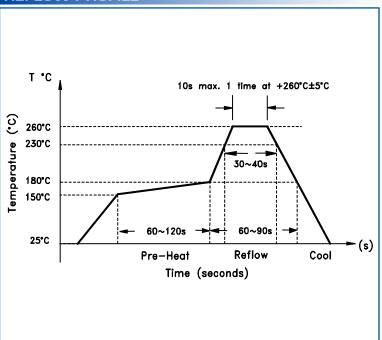

**ATTENTION:** Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

