

SPECIFICATION

FOR APPROVAL

Customer : _____

Product Name : Siren _____

Model Name : VS-BZ100-2P _____

Drawing No. : VS20220401009 _____

Signature of Voice

Approved by	Checkde by	Issued by	Date

 **福爱斯电子有限公司**
VOISE ELECTRONICS CO.,LTD.

Address:No 96 Mogao Dongqian Lake Industial Area ningbo,China,
Tel:0086-0574-87773030;Fax:0086-0574-87471600 P.C.315121
<http://www.nbvoise.com> Email:sales@nbvoise.com

Specification for Siren		Page	2/5
		Revision No.	1.0
Model No.:	VS-BZ100-2P	Drawing No.	VS20220401009

1. Scope

This product specification is applied to the siren in alarm systems. Please contact us when using this product for any other applications than described in the above.

2. General Characteristics

- 3.1 Out-Diameter : 47x39 mm
- 3.2 Height : 27 mm
- 3.3 Weight : 31 g±2g
- 3.4 Operating Temperature : -20~+60°C without loss of function
- 3.5 Store Temperature : -30~+70°C without loss of function

3. Electrical and Acoustic Characteristics.

Test condition : 15 ~ 35 °C Temp., 25% ~ 75% RH, 86~106 kPa Refer to IEC60268-1

No	Items	Specification
1	Rated Voltage	12VDC
2	Working Voltage	6-24VDC
3	Sound Preesure Level	95dB/100dB/103dB/108dB at 6V/9V12V/24VDC/100cm
4	Rated Current	High:<80mA/12VDC
5	Tone Nature	Siren
6	Housing Material	ABS
7	Color	Black


Specification for Siren		Page	3/5
		Revision No.	1.0
Model No.:	VS-BZ100-2P	Drawing No.	VS20220401009

4. Reliability Test

After test(1~5item), the buzzer S.P.L . difference shall be within $\pm 8\text{dB}$, and the appearance not exist any change to be harmful to normal operation



No	Items	Specification
1	High Temp.Test	After being woked in a chamber with $+60\pm 2\text{ }^\circ\text{C}$ for 2h and then being placed in natural condition for 2h, and then check.
2	Low Temp.Test	First being worked in a chamber with $-20\pm 2\text{ }^\circ\text{C}$ for 2h and then being placed in natural condtion for 2h, and then check.
3	Humidity Test	After being placed in a chamber with 90 to 95%R.H. at $+40\pm 2\text{ }^\circ\text{C}$ for 2 h and then being placed in natural condition for 2h ,and then check.
4	Shock Test	Under acceleration of peak $100\text{m/s}^2(10\text{g})$ & half sine wave pulse(pulse time is 16ms) condition. Run into product 100 times continuously.
5	Vibration Test	Being applied vibration of amplitude of 1.5mm with 10-30Hz band of vibration frequency,X.Y.Z.3 direction.2 hours each, total 6 hours.
6	Drop Test	Free drop fram 1.0 meter height to a board 20mm thick hard wood board. and be nothing mechanical damage. tatol 6 times.

5. Measurement Method

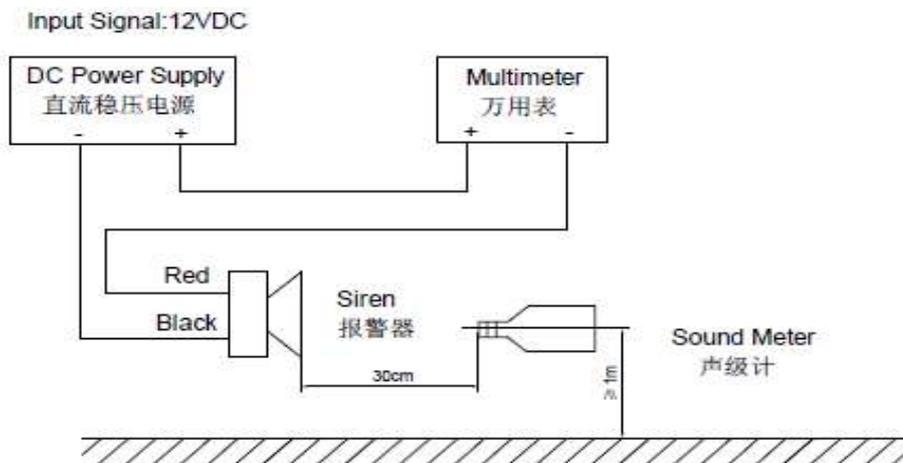

Specification for Siren		Page	4/5
		Revision No.	1.0
Model No.:	VS-BZ100-2P	Drawing No.	VS20220401009

6. Dimensions

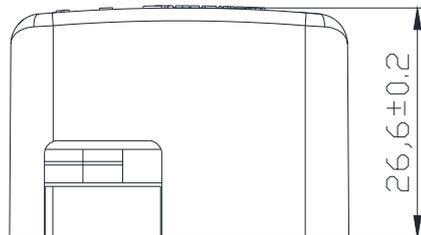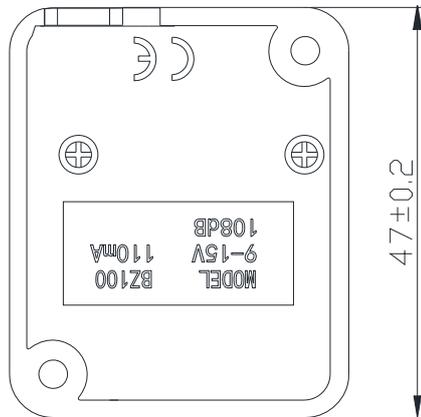

FIRST ANGLE PROJECTION



UNIT : mm
Tolerance : ±0.2

Specification for Siren		Page	5/5
		Revision No.	1.0
Model No.:	VS-BZ100-2P	Drawing No.	VS20220401009

7. Packing

Each minimum package unit of products shall be in a carton box and it shall be clearly marked with Part Number ,quantity and outgoing inspection number.

There shall be no mechanical damage on products during in storage.

40x40x19CM
with box:480pcs/CTN
Without OX:360pcs/CTN